


Create the perfect entertainment experience!

Cardio Theater™ wireless systems offer fitness facility users a state of the art entertainment experience. Our latest wireless system combines functionality, performance and style to bring high-fidelity sound to each individual. The 900 MHz system features individually selectable frequencies, resulting in static-free performance regardless of location or environment – particularly important for large facilities. For the cost-conscious, Cardio Theater also offers a wireless FM system – a great entry level solution for the mid or small-sized facility. Both solutions are easy to setup and use, and both will give your facility an edge on your competition.



xTV 900 MHz & FM Wireless Systems Specifications

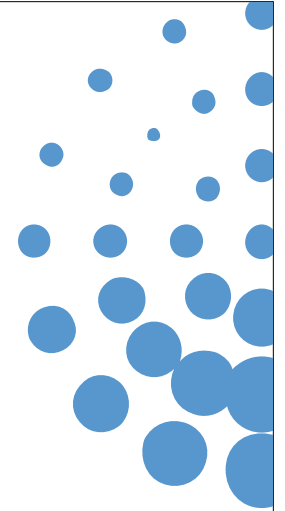

900 MHz Wireless System



xTV-9T Single Channel Transmitter



xTV-9TM Multi Channel Transmitter



xTV-9R Receiver

Specifications	xTV-9T Single Channel Transmitter	xTV-9TM Multi Channel Transmitter	Specifications	xTV-9R Receiver
Available channels	Single audio input channel	4 audio input channels	Universal compatibility with:	
Available xTV Modes	32 frequencies US/Canada 16 frequencies Australia,	32 frequencies US/Canada 16 frequencies Australia,	xTV modes	32 frequencies US/Canada 16 frequencies Australia,
Available LCS Modes	N/A N/A	52 frequencies US/Canada 24 frequencies Australia	LCS modes	52 frequencies US/Canada 24 frequencies Australia
Transmission range	150 feet from antenna	150 feet from antenna	Other mode	32 frequencies for BroadcastVision™
Transmission bandwidth	904.4 MHz - 926.2 MHz	903.0 MHz - 926.8 MHz	Special features	Quick-change headphone jack Moisture seal power connector
Frequency range	Adjustable 905.0 - 925.6 MHz	Adjustable 903.6 - 926.2 MHz	Dimensions	2.7" x 4.25" x 1.5"
Transmission power	95 dbmx maximum	95 dbmx maximum	Weight	3 oz.
Level gain control	Automatic level control	Automatic level control	Power supply	Powered by CSAFE equipment Optional external power supply
Dimensions	5.5" x 2" x 6"	19" x 3.87" x 14.75"	Warranty	1 year parts & labor
Weight	1 lb.	7.5 lbs.		
Power supply	9 VDC, 300 mA adaptor	120 - 220 volt select switch		
Warranty	3 years parts & labor	3 years parts & labor		

FM Wireless System



xTV FM Transmitter



xTV-FM Receiver

Specifications	xTV FM Transmitter	Specifications	xTV-FM Receiver
Available channels	Single audio input channel	Available channels	FM tuning from 88.1 - 107.9
Tuning & FM Band	PLL lock tuning 88.1 - 107.9 MHz	Special features	Quick-change headphone jack
Programming modes	Station, vol., lock & stereo/mono	Dimensions	2.7" x 4.25" x 1.5"
Dimensions	5.25" x 1.5" x 5.5"	Weight	3 oz.
Weight	.5 lbs.	Power supply	Powered by CSAFE equipment Optional external power supply
Power supply	12 VDC @ 300 mA	Warranty	1 year parts & labor
Warranty	3 years parts & labor		

For more information please contact:

Cardio Theater
 20031 142nd Ave. NE
 P.O. Box 7202
 Woodinville, WA USA 98072-4002
 Call Toll-Free: 800-776-6695
 Phone: (425) 486-9292
 Fax: (425) 486-3856
 Email: sales@cardiotheater.com
<http://www.cardiotheater.com>

© 2006 Cardio Theater, a Division of Precor Inc.
BRxTVWireless-101,1205